




DIGITAL VOICE COMMUNICATOR

DVC

Monitors, Identifies and Verbally Reports Alarm Status, Abnormalities and Emergencies.

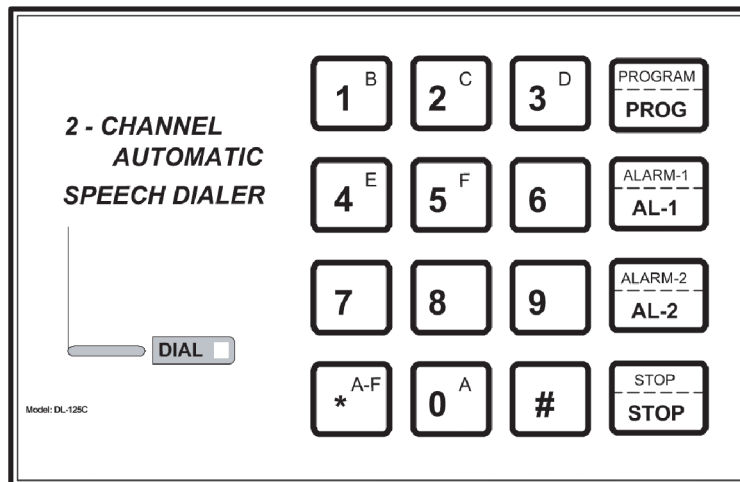

The DL-125C is an automatic programmable speech dialer with two alarm inputs. It is designed to verbally report two separate events, one event per input. Each event can be reported to four different remote telephones, or both events can be reported to the same four telephones. The user may program the telephone numbers of the called parties.

FEATURES:

- Program voice messages with an internal microphone
- Two independent callers for maximum flexibility
- Tone and pulse dialing with four second delay for long distance
- Auto-dials up to eight telephone numbers or pagers
- Telephone numbers can be reprogrammed by the user
- Repeats each message up to eight times
- Each channel has a normally opened or normally closed input
- 10 to 14VDC operation
- Current consumption: 90mA on standby, 250mA during operation
- Complete power package with 4 AH 12 VDC battery provided
- CEMA 1, 12" x 12" x 6" enclosure
- CEMA 4x (optional)