



TIME DOSING CONTROLLER


TDC

Designed for Commercial and Residential Waste Water Handling.

Simplex (1/4 HP – 7.5 HP Pump)
Duplex (120v, 230v - 1Ø)

FEATURES:

- Modular circuit board
- Safe low voltage operation
- Motor contactor and circuit protector
- Accept 3 floats - redundant, timer energize, high level
- Visual and audible alarm
- Hand-off auto selector switches
- Build-in low level protection
- System test/silence switch
- 12 VDC output for remote alarm

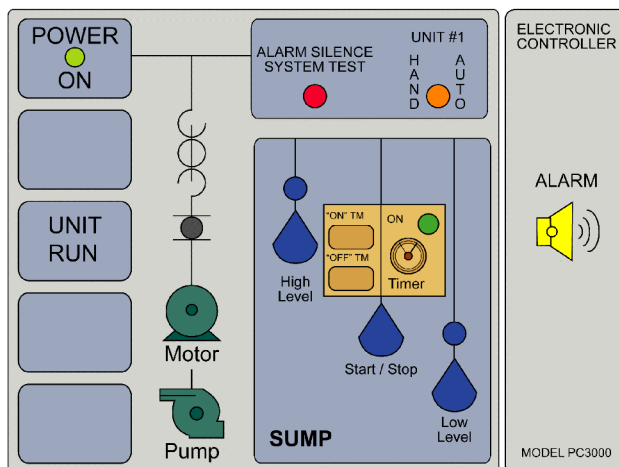

Northwest Tech-Con System's TDC time governed dosing controller is specifically designed to control the amount of fluid from effluent tanks to septic fields. An adjustable dual timer permits the pump to deliver the proper amount of liquid volume to the field. The system is controlled by mechanical floats, which operate when fluid levels in the effluent tanks reach designated levels. A high-level alarm will provide immediate warning in case of system malfunctions. TDC controller comes in two different configurations for simplex or duplex application.

Ordering Information

S-TDC	— 120 —	A CD
D-TDC		
T-TDC	Voltage	Options
		by
Simplex / Duplex / Triplex		Letter